

HLS-10

热风缝口密封机


Hot air seam sealing machine



功能:

采用PLC编程控制, 人机界面触摸式数字显示操作, 上下压轮链条同步传动、自动微退、自动送带、自动剪带、自动带尾完成。本机兼备“自动剪带定长”“脚踏剪带定长”“人工剪带”三种模式操作。


Function: PLC programming control, man-machine interface touch type digital display operation, up and down pressure wheel chain synchronous drive; Automatically slightly back; Automatic tape feeding; Automatic cutting tape; Automatic tape tail finish. The machine is equipped with three modes of operation: "automatic cutting belt fixed length", "foot cutting belt fixed length" and "manual cutting belt".

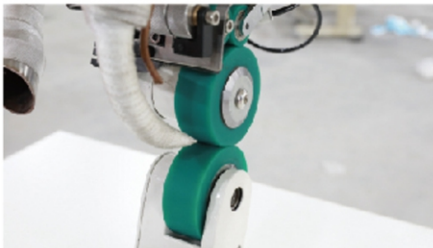

上下压轮可差动变速
The up and low roller can be differential variable speed



自动化剪带
Automatic cutting tape

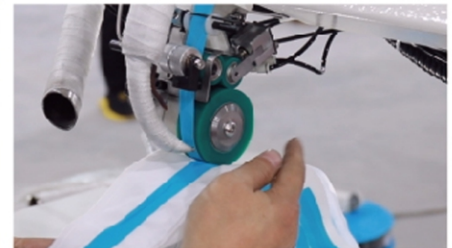

智能保护系统
Intelligent protection system

使用范围: 适合于EVA、PPE、PVC、PU、橡胶、三层布面料的防水、防漏服装、鞋类及橡胶制品。服饰类: 防护服、风雨衣、滑雪衣、潜水衣、太空服、帐篷、车罩、船罩和空气球。鞋类: 滑雪鞋、防水袜套、一次性鞋罩、真皮女鞋、PU鞋、飞织鞋、弹力靴等制造工厂贴防水条及贴布带使用。

Application: Its used for Manufacturing plant paste waterproof strip and tape. Suitable for EAV ,PPE PVC,PU, rubber, Waterproof, leakproof clothing, footwear and rubber products of three layers of cloth (clothing: raincoat, ski suit, diving suit, space suit, tent, car cover, boat cover and air ball). Footwear: ski shoes, waterproof socks, disposable shoe cover, leather women's shoes, PU shoes, flying knitting shoes, elastic boots, etc.

电压 Voltage	功率 Power	耗气量 Air consumption	速度 Speed	热力控制 Heating control	尺寸 Size	毛/净重 G/N.W
220V 50HZ	3600W	0.35-0.5MPA	1-24m/min	最高MAX700°C	1380x680x1650mm	170/125KG